

BPE36V60ART2US/BPE72V60ART2US

EXTENDED BATTERY MODULE TO PROLONG RUNTIME WITH HOT-SWAPPABLE DESIGN

The battery module allows users to perform battery maintenance without interruption



Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The products feature hot-swappable battery packs, allowing users to safely remove and replace battery packs without affecting connected loads.

SERIES FEATURES

- Rack/Tower Convertible Configurations
- Sealed Lead-acid Batteries
- User-replaceable Batteries
- Hot-swappable Batteries
- EBM Expansion Capability
- Metal Housing

PRODUCT CALLOUTS

- 1 . DC Output Cable
- 2 . DC Input Connector
- 3 . On-Board Replaceable Fuse Cover

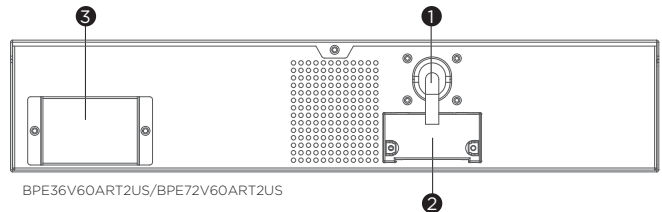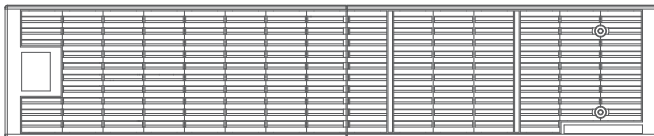

BPE36V60ART2US/BPE72V60ART2US

TECHNICAL SPECIFICATIONS

Model Name	BPE36V60ART2US	BPE72V60ART2US
General		
Nominal Output Voltage (Vdc)	36	72
Rated Output Current (A)	60	60
Battery		
Battery Type	Sealed Lead-acid	Sealed Lead-acid
Built-in Charger	No	No
User Replaceable	Yes	Yes, Qualified Personnel Only
Hot-Swappable	Yes	Yes
Replacement Battery Pack	RBP0074x1, RBP0079x1	RBP0077
Replacement Battery Pack Quantity (pcs)	2	2
Compatible UPS Models	OL1000ERTXL2U, OL1500ERTXL2U	OL2000ERTXL2U, OL3000ERTXL2U
Physical		
Form Factor	Rack/Tower	Rack/Tower
Physical Size		
Dimensions (WxHxD) (mm.)	433 x 88 x 430	433 x 88 x 600
Weight (kg.)	23	44
Installed Rack Height (U)	2	2
Environmental		
Operating Temperature (°C)	0 - 40	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 90	0 - 90
Certifications		
Certifications*	CE, RCM, EAC	CE, RCM, EAC
RoHS	Yes	Yes

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.